

**Firstohm**<sup>®</sup>

*Quality, Reliability,  
Cost-Down via Innovation*



第一電阻電容器股份有限公司

FIRST RESISTOR & CONDENSER CO., LTD.

**Product(s), photos, specifications or data provided herein may be changed at any time without prior notice.** Statements by Firstohm of product feasibility in certain application(s) are based on Firstohm's knowledge of performance characteristics that are typically required in particular applications. Please confirm technical specifications before placing orders.

Copyright © 2014 First Resistor & Condenser Co., Ltd.

Registered Trademarks © First Resistor & Condenser Co., Ltd.

All rights reserved. The contents of this publication may not be reproduced in whole or in part without prior consent of the copyright owner. Printed in Taiwan.

~ To be your valuable partner in the component industry through  
constant product innovation and customer satisfaction ~

~ Firstohm, where OHM comes FIRST ~



Certificate No. FM 577844



Certificate No. EMS 594693








Product Reference Table

Type		C3	C3M	CM	CSM	CSR	EFP	EFR	ESM	FGE	FGE26C	FM	HFT	HVM	HVR	HVR	IG	ISC	ISW	M-Series	MM	MM (V)	MM (P)	MMP
Product Name		Composite Film-type Ceramic Composition Resistor	Composite Film-Type Ceramic Composition MELF Resistor	Carbon Film MELF Resistor	Current Sense MELF Resistor	Current Sense Resistor	Enhanced Film Power MELF Resistor	Enhanced Film Fixed Resistor	ESD Surge Absorber MELF	Fusible Resistor	Fusible Resistor Constant Current	Fusible MELF Resistor	High Frequency Terminator Resistor	High Voltage MELF Resistor	High Voltage Resistor	High Voltage Resistor (High Power)	Ignition Fixed Resistor	Ignition Noise Suppression Resistor (Film/Ceramic Composite Type)	Ignition Noise Suppression Resistor (Wirewound Type)	Metal Film Fixed Resistor	Metal Film MELF Resistor	Metal Film MELF Resistor (Vehicle Grade)	Metal Film MELF Resistor (Pulse Withstanding)	Film MELF Precision Resistor
Industries	Power Supply	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					●		●	●
	Telecomm	●	●	●	●	●	●	●	●				●	●	●						●		●	●
	Meter	●	●	●	●	●	●	●	●				●	●	●	●					●		●	●
	Medical	●	●	●	●	●	●	●	●				●	●	●	●					●		●	●
	Automotive			●	●	●	●	●	●				●	●	●	●	●	●	●		●	●	●	●
	Lighting			●	●	●	●	●	●				●	●	●	●			●	●		●	●	●
Surface Mount Enabled		●	●	●		●		●				●	●	●	●			●	●		●		●	●

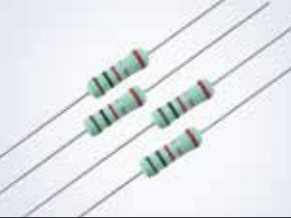

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>C3</b> <b>Composite Film-Type Ceramic Composition Resistor</b></p> <ul style="list-style-type: none"> <li>• Innovative and cost-effective C3 technology (NOTE 1)</li> <li>• Conforms to ANSI/AAMI norm EC53:1995/(R)2008 5.5.3</li> <li>• Suitable replacement for ceramic composition resistors, which are required in most applications.</li> <li>• Maximum permissible surge voltage: 15KV</li> <li>• Typical 10<math>\mu</math>s maximum pulse load: 200000W</li> </ul>	1W	33R ~ 22K	$\pm 5\%$ , $\pm 10\%$ , $\pm 20\%$
	<p><b>C3M100</b> <b>Composite Film - Type Ceramic Composition MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD-enabled structure</li> <li>• Suitable replacement for ceramic composition resistors, which are required in most applications.</li> <li>• Maximum permissible surge voltage: 15KV</li> <li>• Typical 10<math>\mu</math>s maximum pulse load: 40000W</li> </ul>	1W	33R ~ 22K	$\pm 5\% \sim 20\%$
	<p><b>CM</b> <b>Carbon Film MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Excellent solderability termination</li> </ul>	1/6W ~ 1/2W	0, 0.51R ~ 10M	$\pm 5\%$



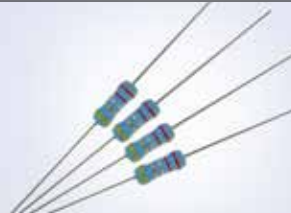
\* All products are RoHS/REACH compliant unless otherwise specified. \* NOTE 1: patent pending

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>CSM</b> <b>Current Sense MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• High power handling with superior reliability and stability</li> <li>• Conformal multi-layer coating against humidity</li> <li>• SMD enabled structure with excellent solderability</li> <li>• HeatSinker™ technology for better heat dissipation</li> <li>• Typical temperature coefficient: 50ppm ~ 600ppm</li> </ul>	1/4W ~ 3W	10mR ~ 510mR	± 1% ~ 5%
	<p><b>CSR</b> <b>Current Sense Resistor</b></p> <ul style="list-style-type: none"> <li>• Offers better reliability than regular low-ohm resistors using our proprietary HeatSinker™ technology</li> <li>• Lead-free tin plated deoxygenized copper wire provides stable value of resistor during operation.</li> <li>• Flame-proof coating available</li> <li>• Typical temperature coefficient: 100ppm ~ 300ppm</li> </ul>	1/4W ~ 5W	68mR ~ 510mR	± 1% ~ 5%
	<p><b>EFP</b> <b>Enhanced Film Power MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• High power handling</li> <li>• Superior reliability and stability</li> <li>• SMD enabled structure with excellent solderability</li> <li>• Typical temperature coefficient: 200ppm ~ 800ppm</li> </ul>	1/2W ~ 5W	0, 0.51R ~ 10M	± 0.5% ~ 5%

\* All products are RoHS/REACH compliant unless otherwise specified.

1986

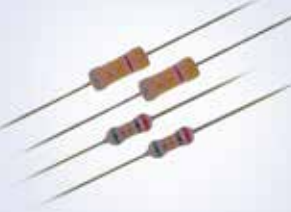


Acquired precision resistor technology from Japan

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>EFR</b> <b>Enhanced Film Fixed Resistor</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• High power handling in small size</li> <li>• Typical temperature coefficient: 50ppm ~ 500ppm</li> </ul>	1/2W ~ 5W	1R ~ 1M	± 1%, ± 2%, ± 5%
	<p><b>ESM</b> <b>ESD Surge Absorber MELF</b></p> <ul style="list-style-type: none"> <li>• Protects the circuit by sparking over the porous layer when surge exceeds the spark-over voltage</li> <li>• Patented construction with reduced costs</li> <li>• High insulation resistance, low capacitance, and fast response time</li> </ul>	$\left\{ \begin{array}{l} 80A @2/10\mu s \\ 60A @8/20\mu s \end{array} \right\}$ Surge Current Capacity	$\left\{ \begin{array}{c} 1300V \\ DC \\ Spark-Over \\ Voltage \end{array} \right\}$	± 30%
	<p><b>FGE</b> <b>Fusible Resistor</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Typical fusing condition - (a) Standard Type: Fuses within 10 sec. at 5W ~ 6.25W (b) Power Types: Fuses within 60 sec. at 8W ~ 24W</li> </ul>	1/4W ~ 3W	2R2 ~ 15K	± 5%

\* All products are RoHS/REACH compliant unless otherwise specified.

1989

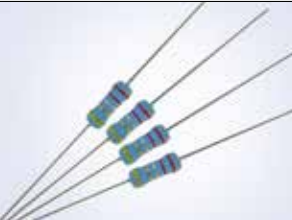



Acquired chip resistor technology from Japan

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<b>FGE26C</b> <b>Fusible Resistor Constant Current</b> <ul style="list-style-type: none"> <li>• Delay fusing within 60 sec. in case of excessive current</li> <li>• Constant current fusing type</li> <li>• Fuses at low magnification of power rating (5.2 times)</li> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Fuses within 10 sec. at 1.6W</li> </ul>	1/4W	0R1 ~ 0R91	±5% ~ 10%
	<b>FM</b> <b>Fusible MELF Resistor</b> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Excellent solderability termination</li> <li>• Fuses within 10 sec. at 9.8W ~ 10.5W</li> </ul>	1/3W ~ 1/2W	2R2 ~ 10K	± 5%
	<b>HFT</b> <b>High Frequency Terminator Resistor</b> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Superior frequency response</li> <li>• Excellent solderability termination</li> </ul>	1/4W ~ 2W	24R9 ~ 75R	± 0.1% ~ 1%

\* All products are RoHS/REACH compliant unless otherwise specified.

1991




Developed Surge/Pulse Resistant Resistors

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>HVM</b> <b>High Voltage MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• Handles much higher working voltage than general purpose resistors</li> <li>• Pure tin-plated termination for excellent solderability</li> <li>• SMD enabled structure</li> <li>• Anti-surge feature available</li> <li>• Maximum working voltage: 600V DC ~ 8400V DC</li> </ul>	1/6W ~ 3W	56K ~ 68M	± 1% ~ 5%
 	<p><b>HVR</b> <b>High Voltage Resistor</b></p> <ul style="list-style-type: none"> <li>• Special conductive film withstands high voltage</li> <li>• Maximum working voltage far over that of general-purpose resistors</li> <li>• Suitable for applications such as TV's, high voltage power supply, and high voltage detection.</li> <li>• Entire series is VDE0860 (EN60065) approved under license number 40011593</li> <li>• Maximum working voltage: 1.6KV DC ~ 12KV DC</li> <li>• Typical temperature coefficient: 200ppm ~ 800ppm</li> </ul>	1/4W ~ 3W	91K ~ 100M	± 1% ± 5%
	<p><b>HVR</b> <b>High Voltage Resistor (High Power)</b></p> <ul style="list-style-type: none"> <li>• Special conductive film withstands voltage far over the maximum working voltage of general-purpose resistors.</li> <li>• Suitable for applications such as TV's, high voltage power supply, and high voltage detection.</li> <li>• Maximum working voltage: 35KV DC</li> <li>• Typical temperature coefficient: 800ppm</li> </ul>	10W ~ 15W	100K ~ 100M	± 1%, ± 5%

\* All products are RoHS/REACH compliant unless otherwise specified.

1991

Developed MELF Resistor

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>IG</b> <b>Ignition Fixed Resistor</b></p> <ul style="list-style-type: none"> <li>• Special coating technique to ensure fast ignition</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special conductive film to fuse at high temperature</li> <li>• Auto cut-off after fusing/no sustaining fire hazard</li> <li>• Special tin-plated electrolytic copper lead wire for optimal ease of soldering and mounting</li> </ul>	1/6W	1R ~ 150R	± 5%
	<p><b>ISC</b> <b>Ignition Noise Suppression Resistor (Ceramic Film Composite Type)</b></p> <ul style="list-style-type: none"> <li>• Dedicatedly designed for high-voltage spark ignition systems</li> <li>• Proprietary ceramic composite withstands high-voltage surge impacts with long-term stability.</li> <li>• One of few sources in the world capable of manufacturing such type of resistor</li> </ul>	1/2W ~ 3W	1K ~ 10K	±5% ~ 20%
	<p><b>ISW</b> <b>Ignition Noise Suppression Resistor (Wirewound Type)</b></p> <ul style="list-style-type: none"> <li>• Dedicatedly designed for high-voltage spark ignition systems</li> <li>• Enhanced weld spot is reliable against surge with long-term stability</li> </ul>	2W ~ 3W	1K ~ 5K	±5% ~ 20%

\* All products are RoHS/REACH compliant unless otherwise specified.

1998

Developed High-Voltage Resistors

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>M-Series</b> <b>Metal Film Fixed Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> </ul>	1/6W ~ 3W	0R1 ~ 10M	± 0.1% ~ 5%
	<p><b>MM</b> <b>Metal Film MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Excellent solderability termination</li> <li>• Typical 10µs maximum pulse load: 32W ~ 70W</li> <li>• Typical temperature coefficient: 25ppm ~ 100ppm</li> </ul>	1/6W ~ 1/2W	0, 0R51 ~ 10M	± 1%, ± 2%, ± 5%
	<p><b>MM(V)</b> <b>Metal Film MELF Resistor, Vehicle Grade</b></p> <ul style="list-style-type: none"> <li>• AEC-Q200 compliant</li> <li>• Excellent solderability termination</li> <li>• Typical 10µs maximum pulse load: 35W ~ 80W</li> <li>• Typical temperature coefficient: 25ppm ~ 100ppm</li> </ul>	1/4W ~ 1/2W	0R47 ~ 10M	± 1%, ± 2%, ± 5%

\* All products are RoHS/REACH compliant unless otherwise specified.


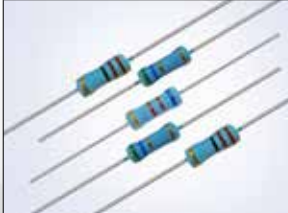

1999

Established management system according to ISO14000 standards

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>MM102</b> <b>Metal Film MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD-enabled structure</li> <li>• Excellent solderability termination</li> <li>• Typical temperature coefficient: 25ppm ~ 100ppm</li> </ul>	0.2W	0, 0.22R ~ 2.2M	±0.5% ~ 5%
	<p><b>MM(P)</b> <b>Metal Film MELF Resistor (Pulse Withstanding)</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Excellent solderability termination</li> <li>• Enhanced pulse withstanding capability</li> <li>• Typical temperature coefficient: 50ppm, 100ppm</li> <li>• Typical 1.2/50µs maximum pulse voltage: 4000V</li> </ul>	1/6W ~ 1/2W	0R1 ~ 330K	± 1%, ± 2%, ± 5%
	<p><b>MMP</b> <b>Metal Film MELF Precision Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Excellent solderability termination</li> <li>• Typical 10µs maximum pulse load: 32W ~ 70W</li> <li>• Typical temperature coefficient: 5ppm ~ 50ppm</li> </ul>	1/6W ~ 1W	10R ~ 1M	± 0.1%, ± 0.25%, ± 0.5%

\* All products are RoHS/REACH compliant unless otherwise specified.




2001  
ISO 9001 certified

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>MMP(V)</b> <b>Metal Film MELF Precision Resistor, Vehicle Grade</b></p> <ul style="list-style-type: none"> <li>• AEC-Q200 Compliant</li> <li>• Excellent solderability termination</li> <li>• Typical 10<math>\mu</math>s maximum pulse load: 35W ~ 80W</li> <li>• Typical temperature coefficient: 15ppm ~ 50ppm</li> </ul>	1/4W ~ 1/2W	10R ~ 1M	$\pm 0.1\% \sim 0.5\%$
	<p><b>MO</b> <b>Metal Oxide Film Fixed Resistor</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Solvent resistant</li> <li>• Special tin-plated electrolytic copper lead wire</li> </ul>	1/2W ~ 10W	0R1 ~ 330K	$\pm 5\%$
	<p><b>MP</b> <b>Metal Film Precision Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Typical temperature coefficient: 10ppm ~ 50ppm</li> </ul>	1/6W ~ 1/2W	10R ~ 1M	$\pm 0.05\% \sim 0.5\%$

\* All products are RoHS/REACH compliant unless otherwise specified.

**2004**

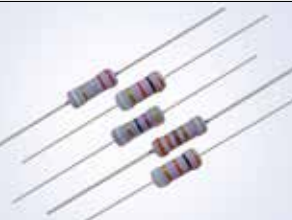


High-Voltage Resistor (HVR series) passed VDE0860 (EN60065)

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>MSD</b> <b>Pulse Safety Resistor</b></p> <ul style="list-style-type: none"> <li>• Special composite film on high grade ceramic substrate</li> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Excellent anti-surge capability. Typical 10<math>\mu</math>s pulse load: 110W ~ 6200W</li> <li>• Absorbs pulse from city power line, direct crossing or inductive coupling and protects electric equipment or parts from accidental shock</li> <li>• Low-cost alternative to wire-wound resistors</li> </ul>	1/4W ~ 6W	0R1 ~ 1M	$\pm 0.1\% \sim 5\%$
	<p><b>MVM</b> <b>Medium Voltage MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Anti-surge feature available</li> <li>• Pure tin-plated termination for excellent solderability</li> <li>• Handles much higher working voltage than general purpose resistors</li> <li>• Maximum working voltage: 750V DC - 1,000V DC</li> </ul>	1/6W ~ 1/4W	56K ~ 40M	$\pm 5\%$
	<p><b>MVR</b> <b>Medium Voltage Resistor</b></p> <ul style="list-style-type: none"> <li>• Higher working voltage with improved reliability</li> <li>• Proprietary conductive film</li> <li>• Especially suitable for SMPS &amp; lighting devices</li> <li>• Low-cost alternative to metal-glazed resistors</li> <li>• Maximum working voltage: 550V DC ~ 7KV DC</li> <li>• Typical temperature coefficient: 100ppm ~ 800ppm</li> </ul>	1/4W ~ 2W	47K ~ 100M	$\pm 0.1\% \sim \pm 5\%$

\* All products are RoHS/REACH compliant unless otherwise specified.


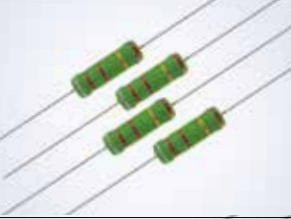
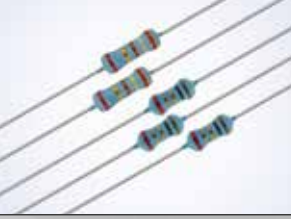
2008

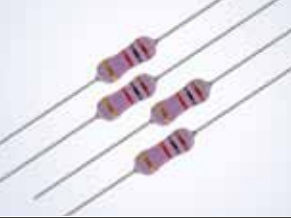Developed Current Sense MELF Resistor

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>NFR</b> <b>Non Flammable Carbon Film Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer non-flammable coating</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> </ul>	1/6W ~ 2W	1R ~ 10M	± 5%
	<p><b>NWA</b> <b>Non-inductive Wire Wound Resistor</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating equivalent to UL 94- V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Special wire winging technique</li> <li>• Special tin-plated electrolytic cooper lead wire</li> </ul>	6W ~ 10W	0.1R ~ 1K1	±5%
	<p><b>PMA</b> <b>Professional Metal Film Axial Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating</li> <li>• Excellent stability and better power handling</li> <li>• Typical temperature coefficient: 5ppm ~ 100pm</li> </ul>	2/5W ~ 1.2W	1R ~ 4M7	± 0.1% ~ 5%

\* All products are RoHS/REACH compliant unless otherwise specified.

First non-resistor product officially launched - Spark-Gap Surge Absorber (SGS) **2010**

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>PPR</b> <b>Pulse Protective Resistor</b></p> <ul style="list-style-type: none"> <li>• Application: high-frequency, sharp-impulse circuits.</li> <li>• Protects active components in missile detonators, triac switching circuits, etc.</li> <li>• Offers better performance than carbon composition resistor.</li> <li>• No "sintering effect" caused by high surge that greatly decreases resistance value.</li> <li>• Conformal multi-layer non-flammable coating</li> <li>• Maximum permissible surge voltage: 7KV ~ 20KV</li> <li>• Typical 10µs maximum pulse load: 110W ~ 1600W</li> </ul>	1/4W ~ 2W	2R2 ~ 4M7	± 5%
	<p><b>PSR</b> <b>Power Sink Resistor</b></p> <ul style="list-style-type: none"> <li>• Designed to replace cement resistors</li> <li>• Auto insertion feasible</li> <li>• Enhanced conductive film absorbs pulse noise</li> <li>• Superior-grade ceramic core dissipates heat efficiently</li> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Maximum permissible surge voltage: 20KV</li> <li>• Typical 10µs maximum pulse load: 10000W</li> </ul>	6W	1R ~ 4M7	± 5%
	<p><b>PWR</b> <b>Power Metal Film Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Typical temperature coefficient: 250ppm</li> </ul>	3/5W ~ 2W	0R22 ~ 1M	±1% ~ ± 5%

\* All products are RoHS/REACH compliant unless otherwise specified.

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>R-Series</b> <b>Carbon Film Power Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Non-flammable coating option available</li> </ul>	1/6W ~ 3W	1R ~ 10M	± 5%
	<p><b>SCP</b> <b>Short Circuit Protection Resistor</b></p> <ul style="list-style-type: none"> <li>• Advanced multi-functional design</li> <li>• Cut-off on overload or accidental short circuit</li> <li>• Transient withstanding for power-line coupling</li> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Possible alternative to wire-wound resistors</li> <li>• Maximum overload voltage: 600V ~ 700V</li> <li>• Fuses within 60 sec. at 12W ~ 30W</li> </ul>	1/2W ~ 3W	2R2 ~ 10K	± 5%
	<p><b>SFP</b> <b>Stabilized Film Power MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• Low temperature coefficient and tolerances</li> <li>• Excellent stability</li> <li>• Superior power handling</li> <li>• Typical temperature coefficient: 50ppm ~ 200ppm</li> </ul>	1/2W ~ 3W	0R5 ~ 10M	± 0.5% ~ 5%


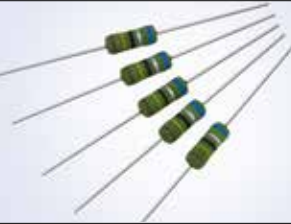

\* All products are RoHS/REACH compliant unless otherwise specified.

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>SFP(V)</b> <b>Stabilized Film Power MELF Resistor, Vehicle Grade</b></p> <ul style="list-style-type: none"> <li>• AEC-Q200 Compliant</li> <li>• Low temperature coefficient and tolerance</li> <li>• Superior power handling</li> <li>• Typical temperature coefficient: 25ppm - 50ppm</li> </ul>	1/2W ~ 3W	0R22 ~ 332K	±1% ~ 5%
	<p><b>SGS</b> <b>Spark-Gap Surge Absorber</b></p> <ul style="list-style-type: none"> <li>• Low-cost patented construction (EP 09000962.2)</li> <li>• No light-dark effect</li> <li>• Low capacitance / short response time / fast ignition</li> <li>• Response time: ≤1ns</li> </ul>	<ul style="list-style-type: none"> <li>80A @2/10us</li> <li>60A @8/20us</li> </ul> <p>Surge Current Capacity</p>	1550V ~ 3300V DC Spark-Over Voltage	± 30%
	<p><b>SL</b> <b>Slug Resistor</b></p> <ul style="list-style-type: none"> <li>• Specially treated metal caps withstand abrasions, impacts, and corrossions, so as to reduce contact resistance during operation. conductive film is enhanced to withstand abrasions, impacts, and corrossions as well. Suitable for clip-in (embedded) application like switches with neon indicators, neon/LED modules, LED display array, etc.</li> <li>• Protective coating is optional</li> </ul>	1/6W ~ 1/2W	1R ~ 9M1	± 5% ~ 10%




\* All products are RoHS/REACH compliant unless otherwise specified.  
\*\* estimated

Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>SLC</b> <b>Slug Resistor Center Coated</b></p> <ul style="list-style-type: none"> <li>• Specially treated metal caps withstand abrasions, impacts, and corrosions, so as to reduce contact resistance during operation. conductive film is enhanced to withstand abrasions, impacts, and corrosions as well.</li> <li>• Suitable for clip-in (embedded) application like switches with neon indicators, neon/LED modules, LED display array, etc.</li> </ul>	1/6W ~ 1/2W	1R ~ 9M1	± 5% ~ 10%
	<p><b>SM</b> <b>Stabilized Metal Film MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal coating against humidity</li> <li>• Excellent solderability termination</li> <li>• Typical 10µs maximum pulse load: 32W ~ 70W</li> <li>• Typical temperature coefficient: 25ppm ~ 100ppm</li> </ul>	1/6W ~ 1/2W	0R51 ~ 10M	± 1% ~ 5%
 	<p><b>SRM</b> <b>Surge Resistant MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• IEC60065 &amp; UL1676 Compliant</li> <li>• Miniaturized MELF design handles high power</li> <li>• Special conductive film enhances anti-surge capability</li> <li>• Absorbs harmful surge which damages precious devices or components</li> <li>• SMD-enabled alternative to carbon composition resistors</li> <li>• Maximum permissible surge voltage: 2KV ~ 10KV</li> <li>• Typical 10µs maximum pulse load: 70W ~ 8000W</li> <li>• Approved to the safety requirement of VDE0860 under license number 40043961</li> </ul>	1/4W ~ 3W	0R1 ~ 2M2	± 1% ~ 5%

\* All products are RoHS/REACH compliant unless otherwise specified.


Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>SSR</b> <b>Surge Safety Resistor</b></p> <ul style="list-style-type: none"> <li>• Designed to replace carbon or ceramic composition resistor</li> <li>• Absorbs harmful surge energy, so to prevent hazard of fire and circuit damage caused by surge energy with a flame proof coating</li> <li>• High-surge applications: fuel ignition systems, power charging/discharging circuits, electrocardiograph cables, etc.</li> <li>• Maximum permissible surge voltage: 10KV ~ 35KV</li> <li>• Typical 10µs maximum pulse load: 1400W ~ 25000W</li> <li>• Conforms to ANSI/AAMI norm EC53: 1995/(R)2008 5.5.3</li> </ul>	1/4W ~ 5W	10R ~ 330K	± 5%
	<p><b>SWA</b> <b>Anti-Surge Wirewound Resistor</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• SWA series can be adopted for high surge applications such as high rush current protection for power capacitor, motor start-up protection, car &amp; motorcycle engine ignition, etc. to absorb harmful surge energy and prevent hazard of circuit damage caused by surge impact.</li> <li>• Enhanced weld spot is reliable against surge impact</li> <li>• Special tin-plated electrolytic copper lead wire</li> <li>• Maximum permissible surge voltage: 12KV</li> </ul>	1W ~3W	0R1 ~ 1K2	± 5%
	<p><b>SWM</b> <b>Anti-Surge Wirewound MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enabled structure</li> <li>• Flameproof multi-layer coating equivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• SWM series can be adopted for high surge applications such as high rush current protection for power capacitor, motor start-up protection, car &amp; motorcycle engine ignition, etc. to absorb harmful surge energy and prevent hazard of circuit damage caused by surge impact.</li> <li>• Enhanced weld spot is reliable against surge impact</li> <li>• Maximum permissible surge voltage: 11KV</li> </ul>	1W ~4W	0R1 ~ 1K2	± 5%

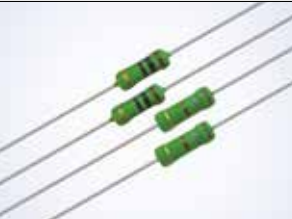\* All products are RoHS/REACH compliant unless otherwise specified.


Resistor	Key Features	Power Rating	Ohm Range	Tolerance
	<p><b>WA</b> <b>Wirewound Resistors</b></p> <ul style="list-style-type: none"> <li>• Flameproof multi-layer coating mequivalent to UL 94 V-0</li> <li>• Flameproof feature equivalent to overload test UL 1412</li> <li>• Color code per MIL &amp; EIA standards</li> <li>• Special tin-plated electrolytic copper lead wire</li> </ul>	1/2W ~ 8W	0R1 ~ 3K3	± 2% ± 5%
	<p><b>ZMM</b> <b>Zero Ohm Metal Film MELF Resistor</b></p> <ul style="list-style-type: none"> <li>• SMD enable structure</li> <li>• Excellent solderability termination</li> <li>• Stable metal film construction</li> </ul>	2A ~ 4A { Maximum Current }	< 20mR	N/A
	<p><b>ZOM</b> <b>Zero Ohm Metal Film Resistor</b></p> <ul style="list-style-type: none"> <li>• Conformal multi-layer coating against humidity</li> <li>• Very low resistance</li> <li>• Stable metal film construction</li> <li>• Special tin-plated deoxygenized copper wire for resistance stabilization during operation</li> </ul>	3A ~ 5A { Maximum Current }	< 10mR	N/A

\* All products are RoHS/REACH compliant unless otherwise specified.

**3-BAND-CODE**  
(Tolerance  $\pm 2\%$ ,  $\pm 5\%$ ,  $\pm 10\%$ )




**4-BAND-CODE**  
(Tolerance  $\pm 0.25\%$ ,  $\pm 0.5\%$ ,  $\pm 1\%$ )




COLOUR	1ST BAND	2ND BAND	3RD BAND	MULTIPLIER	TOLERANCE
Black	0	0	0	1	
Brown	1	1	1	$10^1$	$\pm 1\%$
Red	2	2	2	$10^2$	$\pm 2\%$
Orange	3	3	3	$10^3$	
Yellow	4	4	4	$10^4$	
Green	5	5	5	$10^5$	$\pm 0.5\%$
Blue	6	6	6	$10^6$	$\pm 0.25\%$
Violet	7	7	7	$10^7$	$\pm 0.1\%$
Grey	8	8	8	$10^8$	$\pm 0.05\%$
White					
Gold				$10^{-1}$	$\pm 5\%$
Silver				$10^{-2}$	$\pm 10\%$

COLOUR	1ST BAND	2ND BAND	3RD BAND	MULTIPLIER	TOLERANCE
Black	0	0	0	1	
Brown	1	1	1	$10^1$	± 1%
Red	2	2	2	$10^2$	± 2%
Orange	3	3	3	$10^3$	
Yellow	4	4	4	$10^4$	
Green	5	5	5	$10^5$	± 0.5%
Blue	6	6	6	$10^6$	± 0.25%
Violet	7	7	7	$10^7$	± 0.1%
Grey	8	8	8	$10^8$	± 0.05%
White					
Gold				$10^{-1}$	± 5%
Silver				$10^{-2}$	± 10%

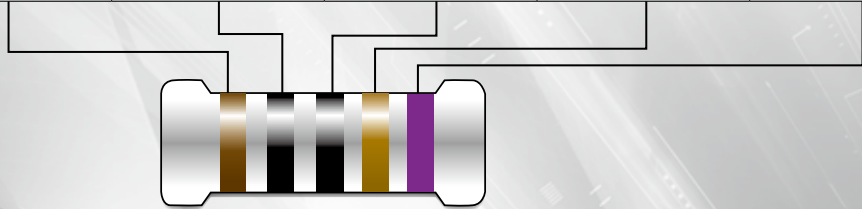

5-BAND-CODE  
(Tolerance ±0.1%)

# Global Reach

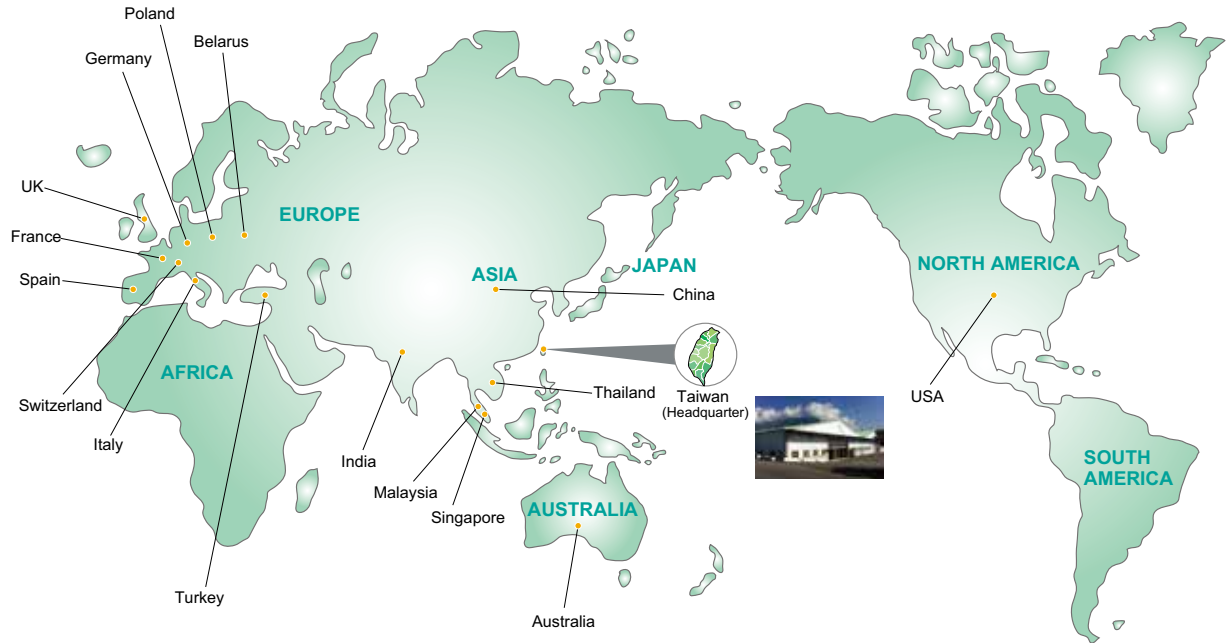

***Firstohm***<sup>®</sup>



FIRST RESISTOR & CONDENSER CO., LTD.

9F., NO.233, Sec. 4, Shinyi Rd., Da-an District, Taipei 106, Taiwan.

<http://www.firstohm.com.tw>

TEL: +886 2 2705 1878    FAX: +886 2 2703 6701

E-mail: [general@firstohm.com.tw](mailto:general@firstohm.com.tw)