


# **HONDAFLOH SEAMLESS BELT®**

## **for Packaging Machines**

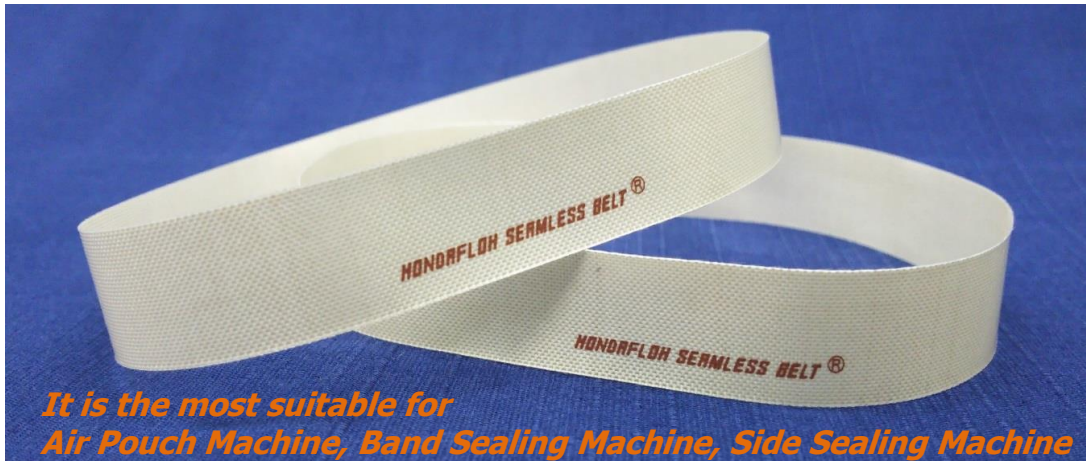

### <FEATURES>

- Endless belt that is made of tubular – weaved Glass fiber coated with PTFE.
- Thickness of belt is flat ⇒ Equal with Thermal conductivity ⇒ **Equal with Heat sealing**
- No broken at belt joint part like jointed belt ⇒ **Long life**
- Smooth running on small pulley



### <TYPICAL PROPERTIES>

HONDAFLOH SEAMLESS BELT®		XHSS-P506-2	XHSS-P508-2	XHSS-P511-2
Thickness (mm)		0.13	0.16	0.24
Weight (g/ m <sup>2</sup> )		260	310	495
Tensile Strength (N/cm)	Warp	225	325	370
	Weft	165	230	485
Tear Strength (N)	Warp	19	32	53
	Weft	15	20	66
Operating Temperature		-100 ~ +260 °C		

\*The figures in the above table are not the specification but the observed values.

### **HONDA SANGYO CO., LTD** **[HEAD OFFICE]**

3814 TOTSUKA-CHO, TOTSUKA-KU,  
YOKOHAMA, JAPAN, 244-0003

TEL: +81-45-869-1133

FAX: +81-45-869-1184

**[FACTORY] NAGASAKI, JAPAN**

CONTACT US :

### **BELIMAX CO., LTD** **[Export Department]**

TEL: +81-45-869-1144

FAX: +81-45-869-1184

Email : yuhei-yoshida@hondafloh.co

URL : <http://www.hondafloh.co.jp>

Scan the QR code  
to watch the video.

